


DRAWING NO. <b>C770RPMVBK10</b>	REV <b>A</b>	<b>Customer Drawing</b>	REVISION HISTORY			
			REV	DESCRIPTION (ECO)	DATE	APPROVED
			A	REVISE LEGACY DRW. FORMAT. UPDATE NOTES ECO 6086	7/01/14	LF

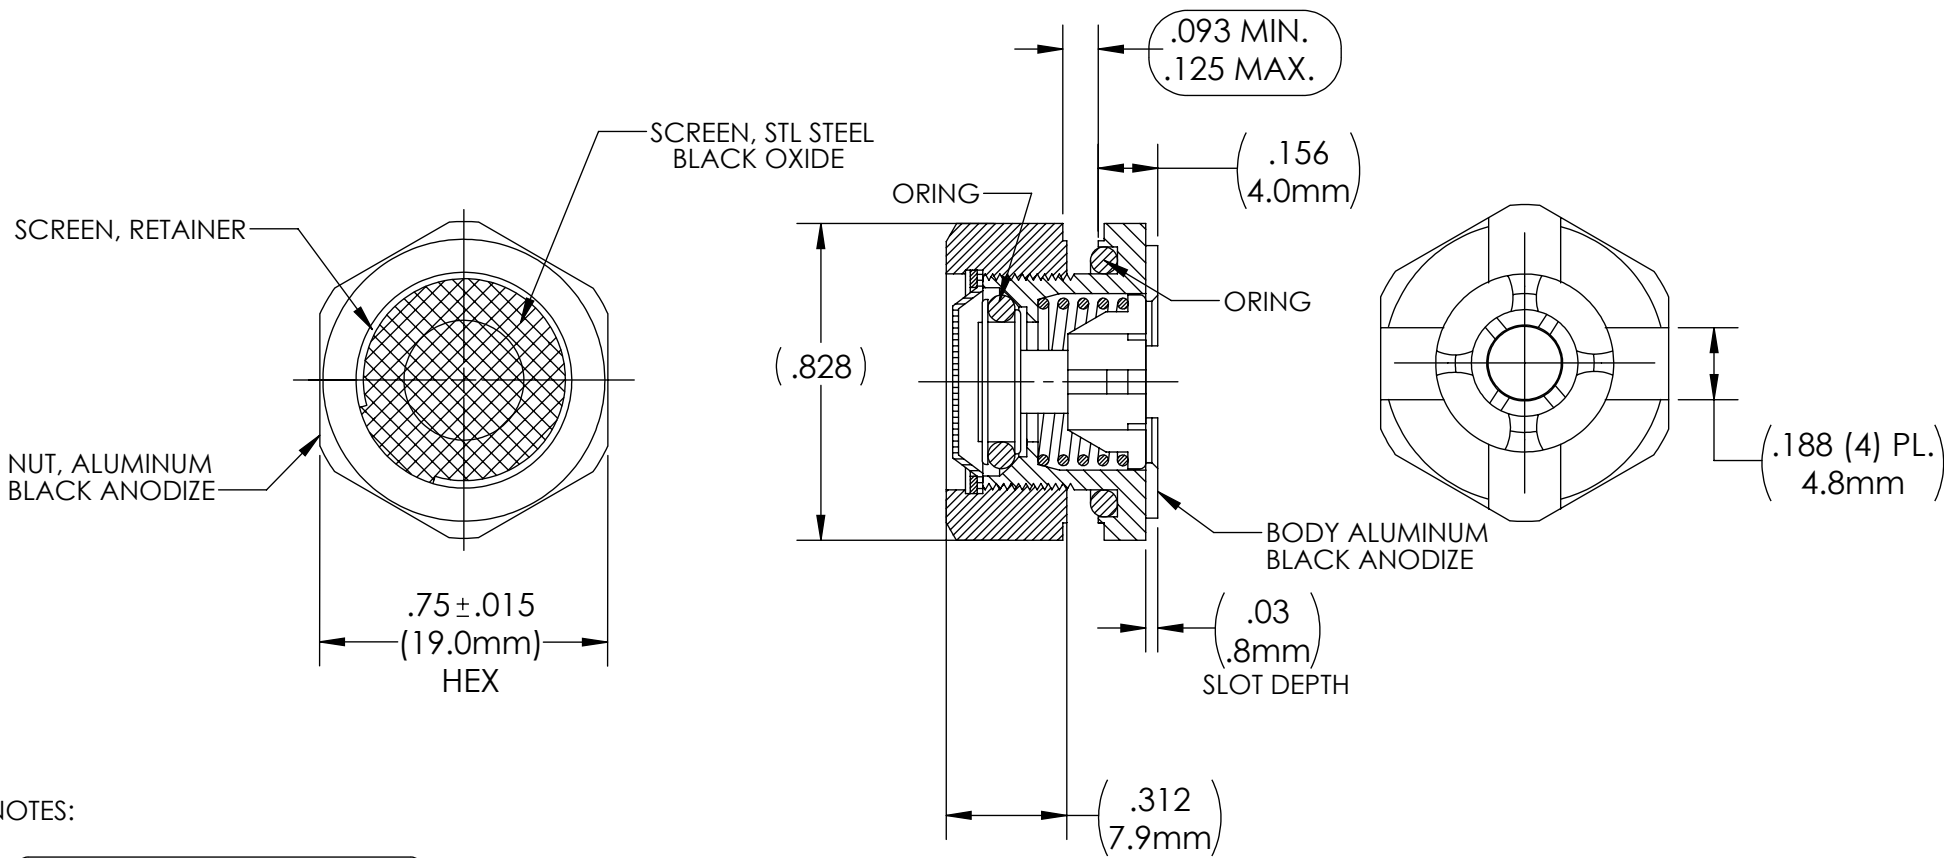

- NOTES:
1. CRACKING PRESSURE 1.0 PSIG  
 TEMPERATURE RANGE: -80°F TO +180°F  
 RUBBER: MIL-R-6855 BUNA N  
 ANODIZE: BLACK MIL-A-8625, TYPE II  
 NICKEL ACETATE SEAL  
 BLACK OXIDE: MIL-C-1394
  2. CRITICAL DIMENSIONS ARE CIRCLED AND SUBJECT TO INSPECTION.
  3. DIMENSIONS IN PARENTHESES ARE FOR REFERENCE ONLY.
  4. ALL DIMENSIONS ARE IN INCHES, WITH NOMINAL SHOWN IN METRIC BELOW.

**MOLDED PARTS:**  
 GATES, PARTING LINES, AND FLASH PER QUALITY CRITERIA

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS SOLE PROPERTY OF HALKEY-ROBERTS CORPORATION ST. PETERSBURG, FL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF HALKEY-ROBERTS CORPORATION IS PROHIBITED.

<b>DRAWN BY</b> dcoughlin		<b>DATE</b> 08/30/00		
<b>APPROVED BY</b>		<b>DATE</b>		
<b>MATERIAL</b>				
<b>FINISH</b>				<b>TITLE</b> RELIEF VALVE, PRESSURE
<b>UNLESS OTHERWISE SPECIFIED:</b> DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: ± 1° TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005		<b>THIRD ANGLE PROJECTION</b> 		<b>SIZE</b> A
		<b>SCALE</b> 2:1		<b>DRAWING NO.</b> C770RPMVBK10
		<b>DO NOT SCALE DRAWING</b>		<b>REV</b> A
		<b>SHEET</b> 1 OF 1		