

ROBERTSITE® T-CONNECTOR SWABABLE VALVE


GENERAL CHARACTERISTICS

- Halkey-Roberts new Robertsite® T-Connector swabable valve incorporates our valve technology in an extension set compatible component with a micro-bore tubing pocket
- It is an ideal application as an extension set for peripheral catheters
- The tubing port is 0.088 inches
- The connector is high flow
- It mates securely with peripheral catheters
- Enhanced visibility with clear housing and septum
- Compatible with power injection up to 325 psi
- All materials are Gamma resistant, ISO 10993 compliant, DEHP-free and not made with natural rubber latex.
- The Swabable Valve series is a medical component: bulk, non-sterile, for manufacturing processing or repacking only.
- Customer is responsible for the Qualification/Verification of the HR® medical component in their final device application.
- Luer fittings are compatible with International Standard ISO 594 and ISO 80369-7



Part Number: 245510024

Average Flow Rate

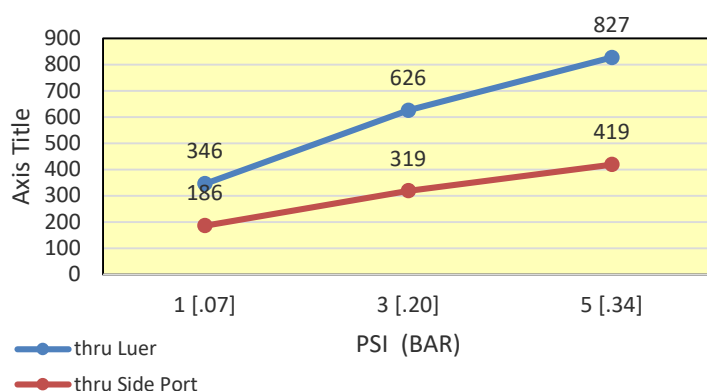

PERFORMANCE CHARACTERISTICS

- Priming Value: 0.164ml

Flow Rate Averages

Flow Direction	1 psi	3 psi	5 psi
Thru Luer	346 ml/min	626 ml/min	827 ml/min
Thru Side Port	186 ml/min	319 ml/min	419 ml/min

MATERIALS

- Swabable Stem: Clear silicone
- Swabable Body: Clear Polycarbonate

PACKAGING AND SHIPPING

- Valves are bulk packaged, double bagged in clean, closed polybags
- Shipping container is clearly labeled with HR® part number, lot number and quantity

POTENTIAL STERILIZATION METHOD

- ETO and Gamma, based on raw material manufacturer's data

Important: All HR® Medical Components are shipped bulk, non-sterile, and are single patient use medical device components requiring further processing (e.g. assembly, packaging, sterilization) before clinical use. The buyer is responsible for determining effects of processing/multiple usage on these components, the appropriateness of the component in the final application, and pre/post shelf life.